Water



MT hot NTEP

Multijet meter

Your benefits

- Mechanical roller register with 0.1 US gallons resolution:
  Efficient consumption monitoring in energy data management
- Transfer of the effective meter reading:
  No data loss and guaranteed security of the billing data
- Register without batteries:
  No service life restriction
- Robust, high grade wear resistant materials:
  Excellent measuring stability and reliability
- Measurement of low flow rates:
  Increased cost effectiveness

Properties

- NSF/ANSI 61-G & 372 certified and marked
- NTEP Approval CC 21-096A1
- Meets AWWA C708 accuracy standards in horizontal position
- Sealed register for tamper resistance
- Meter with high accuracy and durability
- Protection class IP68 with 16.4 ft cable
- Encoder Output – serial data interface to wired or wireless transmitting device
- UL2043 plenum rating for products installed in air-handling spaces

GWF AG
Obergrundstrasse 119
6005 Lucerne, Switzerland

T +41 41 319 50 50
info@gwf.ch, www.gwf.ch

Technical support:
T +41 41 319 52 00, support@gwf.ch


Last updated: 11.06.2026
Generated: 11.11.2026 21:22 | All rights reserved

Specifications

	1"	1½"
Max. flow rate	55 gpm	88 gpm
Max. continuous flow rate	44 gpm	70 gpm
Min. flow rate (+/- 3 %)	0.75 gpm	1.5 gpm
Max. working pressure	230 psi	230 psi
Max. working temp.	194 °F	194 °F
Nominal pipe size	1"	1½"
Connection on meter	1¼" NPSM thread	2" NPSM thread
Main case material	Brass	Brass
Encoder resolution	1/10 gal	1/10 gal

Encoder-Technology

The well-established GWFcoder®-system reads the absolute mechanical register value precisely and reliably and provides the data through standardized serial interfaces. The number wheels with three various long, asymmetrically arranged slots are being scanned through light pipes which are connected to five light emitting diodes (LED). Thus, the exact position of each number wheel can be detected and the encoded absolute register read can be transmitted as part of the M-Bus protocol. This functioning principle is patented by GWF. The GWFcoder®-interface provides an incomparably higher level of information compared to meters with pulse output.

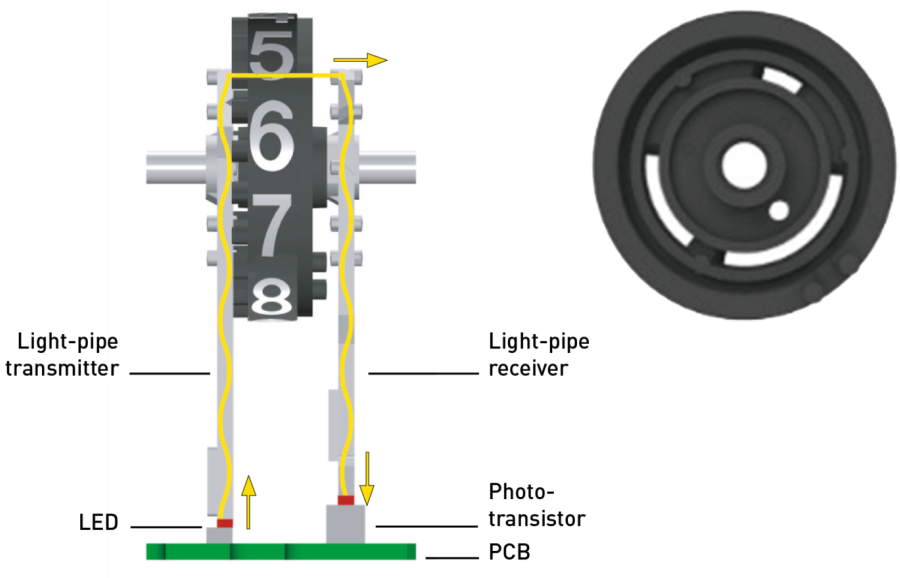

Meter absolut Encoder readout	
Absolute meter reading	1236542.1 US gallons
Serial number	43215678
Meter state	OK
Medium	Hot water

Generated: 11.11.2026 21:22 | All rights reserved

Technical Data


Dimensions and weights			1"	1"	1½"
Length without couplings	**A**	**Inch**	**10.24**	**10.75**	**11.81**
Meter height with lid	B	Inch	5.31	5.31	6.30
Meter height with lid from pipe centre line	C	Inch	3.58	3.58	4.49
Installation depth with lid from pipe centre line	W	Inch	2.24	2.24	2.68
Meter height with open lid	G	Inch	7.20	7.20	8.19
Weight without couplings		lbs	5.73	6.02	11.91
Permissible ambient temperature			+ 41 °F to + 131 °F		
Current consumption			max. 2 M-Bus Loads		
Meter Output Encoder Wired M-Bus			EN 13757-2/-3		
Meter Output Encoder ECO (for radio modules)			EN 13757-3		
Standard transmission speed			2400 baud		
Register protection class			IP68		
Cable length			16.4 ft		

Approval	MTW3coder MP
NTEP hot No. CC 21-096A1	■
New York Certificate No. 10767	■


Certifications	MTW3coder MP
NSF/ANSI 61-G & 372 D.Hot / incl. cold	■

Certified to NSF/ANSI 61-G & 372

Dimension Diagram

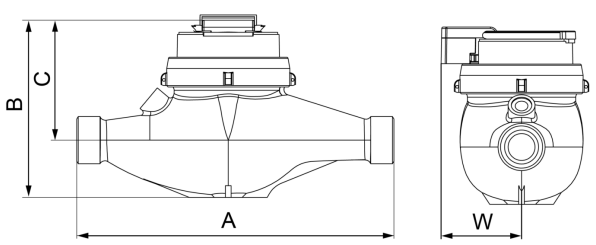


Accuracy chart

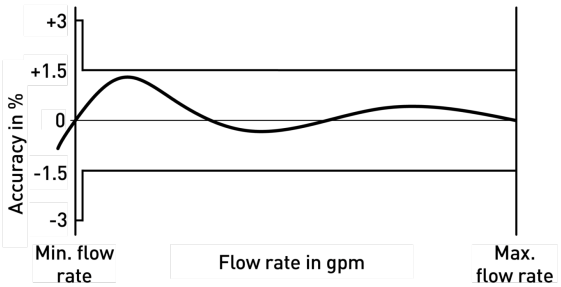

Generated: 11.11.2026 21:22 | All rights reserved

Pressure loss chart

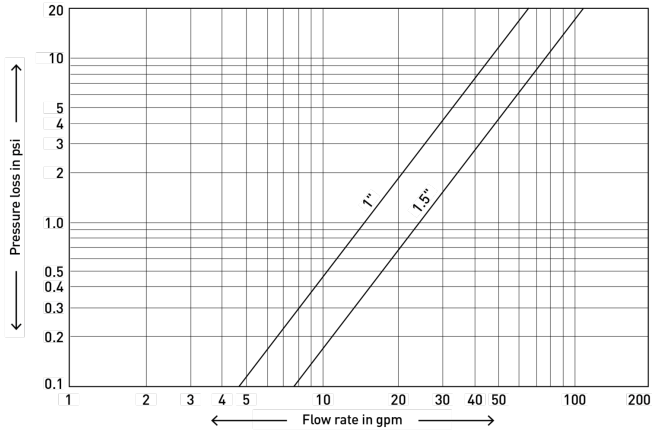

Installation

Pipeline	horizontal	——
Meter head	facing up	↑

Comparison «absolute meter reading» vs. pulse

GWFcoder® technology:


Transfers the effective meter reading. The read-out value in the billing system and the invoice are the same as the meter reading.

Pulse transfer:

The potential sources of error for a reproduced meter reading with pulse transmission are:

- Bouncing
- Backflow water
- Temporary signal interruption
- Double pulses
- Incorrect pulse value

The readout value in the billing system and the invoice may differ from the meter reading leading to diminished revenue stream.

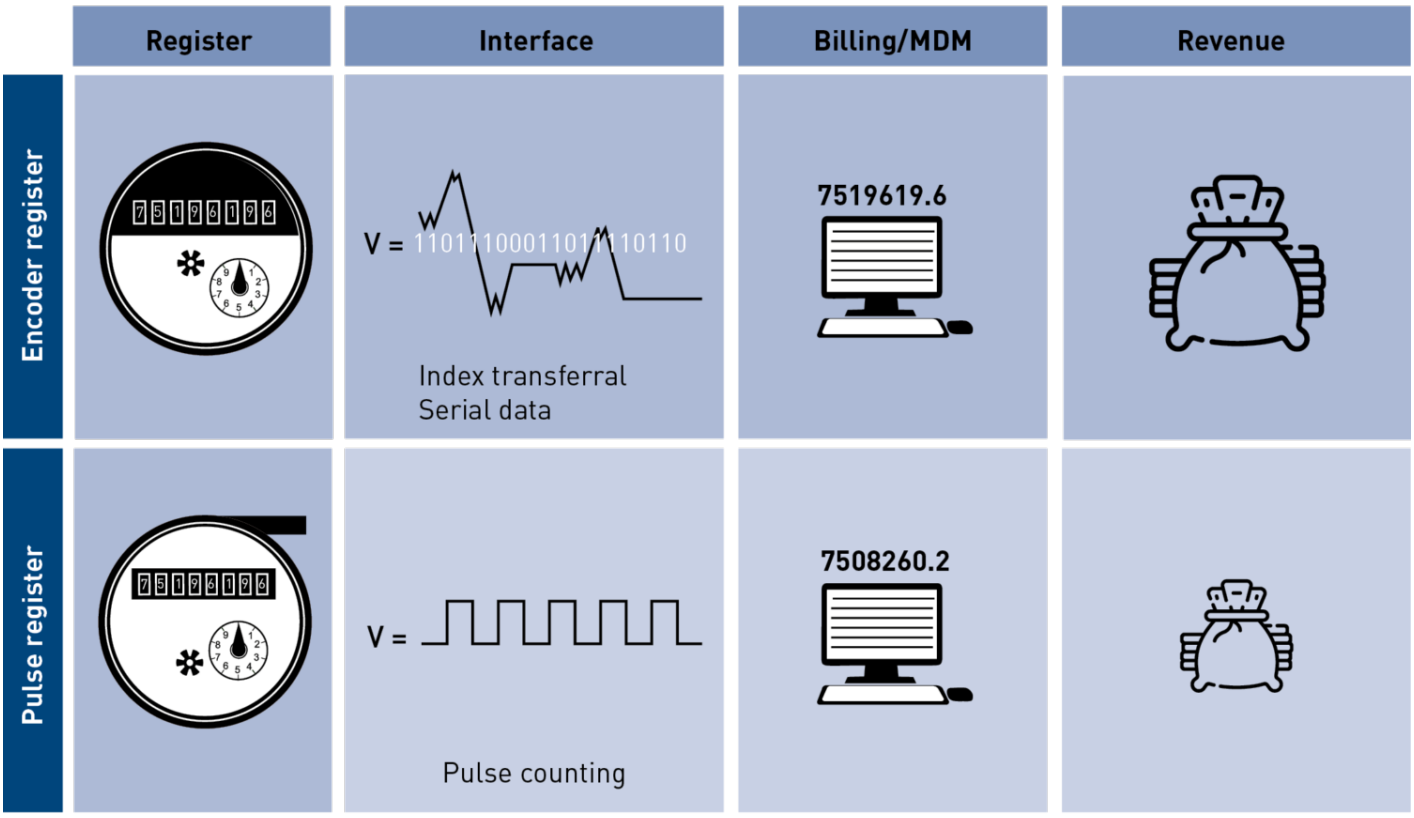

Generated: 11.11.2026 21:22 | All rights reserved