

Integral-V UltraMaxx (CAN)

Heat and cooling meter

Your benefits

- Ultrasonic technology:
  Long-term stable energy measurement with maximum measuring accuracy
- Compact design:
  Less installation space required
- Large measuring range:
  Lower storage costs
- Replaceable calculator:
  Flexible mounting possible (compact/split)
- Display of operating faults and soiling warning:
  Increased operational safety
- Big display:
  Easy to read

Applications

- High-end device for building management
- As a replacement for mechanical impeller heat meters
- Metering of heat and/or cooling consumption in building management

Properties

- Nominal diameters DN 15 or DN 20
- Nominal flow rates q_p 1,5 or q_p 2,5
- Supply via 10-year battery or M-Bus with back-up battery
- Max. operating pressure PN 16 bar
- Universal installation position
- No moving parts
- Electronic calculator
- LCD-resolution 8 digits
- Temperature range 0 – 90 °C
- Temperature sensor Pt 500
- 18 month register
- Max. values (P, Q, T)
- Standard EN 1434
- CE Conformity according European Measuring Instruments Directive (MID) or Conformity according to the Directive Measurement Canada

Options

- Execution on-site reading (Supply via battery, small calculator housing)
- Execution with 2 pulse outputs for heating- and cooling energy (Supply via battery, small calculator housing)
- Execution with M-Bus interface and 4 water meter inputs (Supply via battery, large calculator housing)
- Execution with M-Bus interface and 2 water meter inputs (Supply via M-Bus, large calculator housing)

GWF AG
Obergrundstrasse 119
6005 Lucerne, Switzerland

T +41 41 319 50 50
info@gwf.ch, www.gwf.ch

Technical support:
T +41 41 319 52 00, support@gwf.ch

Last updated: 06.08.2025
Generated: 11.11.2026 21:22 | All rights reserved

Technical Data

Header	
Temperature range	0 to 90 °C
Temperature difference	3 to 90 K
LCD resolution	99'999'999 kWh 999'999,99 m^3
Battery lifetime (Execution with battery)	10 years
Battery lifetime back-up battery (Execution supply via M-Bus)	1 year
Environment class	EN 1434 - class C, 2004/22/EC class E1, M1
Protection class	IP54
Environment temperature	+5 to +55 °C
Storage temperature	-10 to +60 °C
Optical interface	EN 60870-5 / M-Bus protocol
Temperature sensor type	2-wires, Pt 500
Cable length	0,5 m

Temperature sensor	Direct immersion sensor	Pocket sensor
Sensor element	Pt 500	Pt 500
Resistor acc. to	EN 60751 / EN 1434	EN 60751 / EN 1434
Measuring tolerance	Class B	Class B
Temperature measuring range	0 to 90 °C	0 to 90 °C
Temperature difference	3 to 90 K	3 to 90 K
Sensor diameter	3,6/5,4 mm	6 mm
Sensor length	27,5 mm	50 mm
Connection thread	M10x1	Knurled nut M12
Cable type	Smooth cable	Coiled cable
Cable length	1,75 m	1,2 m


Volume measuring meter					
Nominal diameter	DN	mm	15	15	20
Operating pressure	PN	bar	16	16	16
Connection thread on meter	G...A	Inch	¾	1	1
Nominal flow rate	q_p	m^3/h	1,5	1,5	2,5
Maximum flow rate	q_s	m^3/h	3	3	5
Minimum flow rate	q_i	l/h	6	6	10
Starting flow		l/h	2	2	4
Kvs value		m^3/h	3	3	5
Temperature		max. °C	90	90	90
Measuring range	q_i/q_p		1:250	1:250	1:250

Generated: 11.11.2026 21:22 | All rights reserved

Volume measuring meter					
Metrological class			EN 1434 - class 2	EN 1434 - class 2	EN 1434 - class 2
Protection class			IP67	IP67	IP67

Dimensions					
Length without couplings	A	mm	110	130	130
Height total	B	mm	128	128	128
Height from pipe centre line	C	mm	86	86	86
Width calculator	D	mm	88	88	88
Height calculator (small housing)	E	mm	86	86	86
Height calculator (large housing)	F	mm	126	126	126

Dimension Diagram

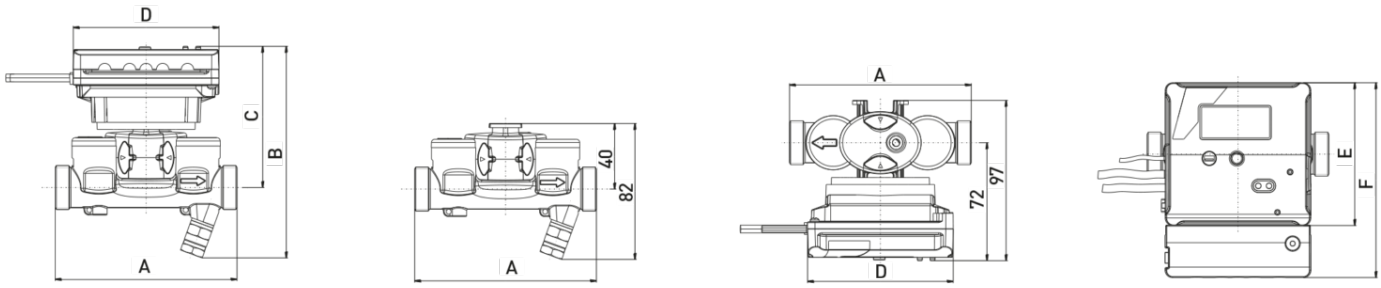

Installation


Integral-V UltraMaXX is approved for all horizontal and vertical installation positions, even overhead.

In combination with the flexible calculation unit attachment, it ensures an optimum reading position.




Flow Measuring Dynamic

The exceptionally large measuring dynamic (2-3300 l/h at qp 1,5) means Integral-V UltraMaXX is a real multi-range meter

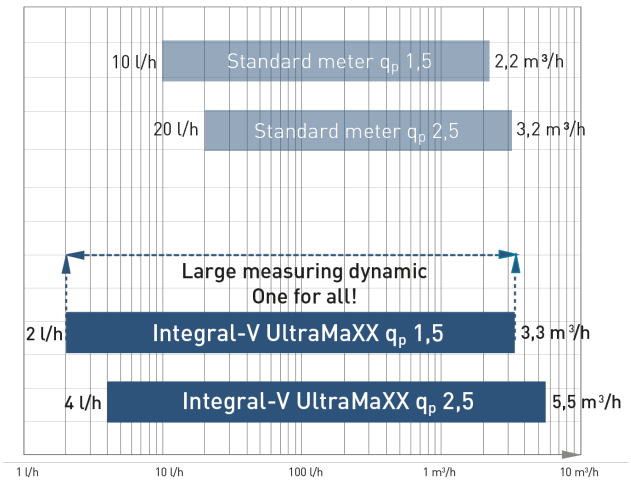

Generated: 11.11.2026 21:22 | All rights reserved

Typical Head Loss Curve

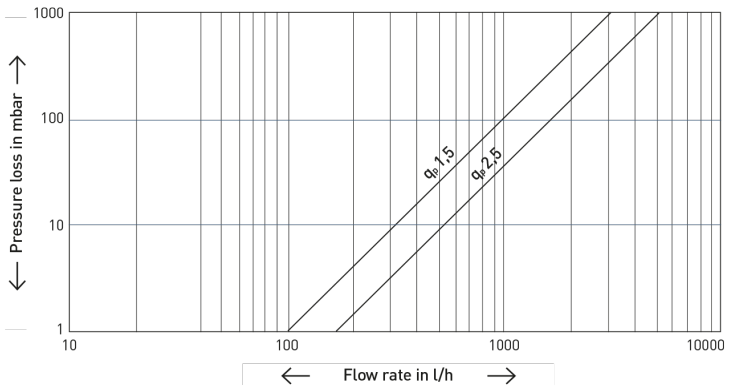

Options

Integral-V UltraMaXX is supplied with integrated options. This enables quick and efficient installation and system setup.

The following versions are available.

Specification for M-Bus interface	
Protocol	M-Bus according EN 13757-3
M-Bus standard load	Supply via battery: 1 standard load (1,5 mA) Supply via M-Bus: 2 standard loads (3 mA)
Standard baud rate	2400 baud
Standard data set	Manufacturer no., energy, volume, flow, power, temperatures (supply, return, difference), operating time, date and time, optional volume water meter inputs, firmware version, software version


Specification for water meter inputs	
Pulse value	1, 2,5, 10, 25, 100, 250 l/pulse (programmable, same pulse value for all connected water meters, standard 10 l)
Scanning voltage	Typically 3 V
Impulse recognition	Contact closed: R <500 Ω Contact opened: R > 1 MΩ Impulse duration / break every > 3 s
Cable length	max. 10 m

Specification for pulse outputs for heating- and cooling energy	
Pulse value	Heating energy: 1 pulse = 1 kWh Cooling energy: 1 pulse = 1 kWh
Pulse characteristic	Passive transducer, Open Collector Pull-down switch
Scanning voltage	max. 30 V, min. 2,5 V
Max. permissible current	max. 20 mA
Max. internal resistance R_{on}	100 Ω (during pulse ON)
Impulse length	120 ms

Generated: 11.11.2026 21:22 | All rights reserved

Multi-function display

Reading errors are minimised by the concise layout on 3 display levels and the clear symbols for status and alarm messages. The various display levels are selected via a red button. Press the button for app. 3 s to access the next level.

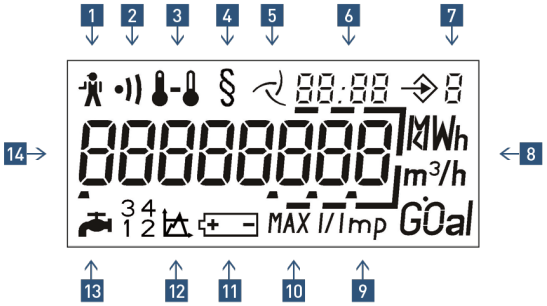

1. Operating fault
2. Soiling warning
3. Temperature
4. Calibrated value display
5. Flow rate display
6. Date/time
7. Display level
8. Units
9. Pulse value of water meter
10. Max. values
11. Calculated battery life
12. Threshold (not occupied)
13. Water meter inputs
14. Main display section

Generated: 11.11.2026 21:22 | All rights reserved