

Gas safety hose

Gas accessories

Your benefits

- Protection against gas leakage:
  Reduction of the fire load, thus increased safety in the event of a fire

Applications

- The gas safety hose is used in gas pipes in domestic installations

Properties

- Thermally resilient up to max. 650 °C
- HTB version

GWF AG
Obergrundstrasse 119
6005 Lucerne, Switzerland

T +41 41 319 50 50
info@gwf.ch, www.gwf.ch


Technical support:
T +41 41 319 52 00, support@gwf.ch

Last updated: 23.06.2026
Generated: 21.11.2026 03:21 | All rights reserved

Technical Data

Art.-No.	Model	Length [mm]	Connection type Input - output	Weight [kg]	Nominal pressure PN [bar]
146.LB005	GSS RTD	1'500	NS – IG	0,490	0,1

Dimension Diagram

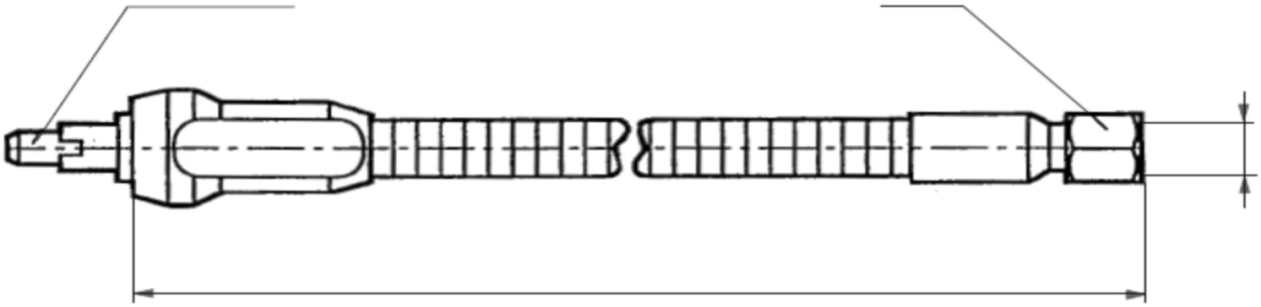

Gas safety hose GSS RTD

Hose length [mm]	Internal thread DIN 2999 d	Standard plug (NS) according to	SW
1'500	Rp 1/2"	DIN 3383 T1	24–6 K

Generated: 21.11.2026 03:21 | All rights reserved