Water



MTKcoder® MP

Multijet domestic water meter

Your benefits

- Mechanical roller register with 1-litre-resolution
  Efficient consumption monitoring in smart metering applications
- Revolutionary Multiprotocol interface:
  Investment security due to the interoperability of the meter
- Transfer of the effective meter reading:
  No data loss and guaranteed security of the billing data
- Batteryless register:
  No service life restriction
- No programming required when commissioning the meter in a readout system (Plug & Play):
  Easy and fast on-site installation
- Standardised interface:
  No service life restriction
- Long service life, robust domestic water meter:
  Excellent measuring stability and reliability
- Measurement of low flow rates:
  Increased cost effectiveness

Applications

- Automated mobile or fixed network readout of relevant billing data
- Wired or radio remote readout of hard to access metering installations, e.g. meter pits, reservoirs

Properties

- Multijet impeller wheel, super dry-dial, magnetic coupling
- Q_3 2,5: Measuring range R100
- Q_3 4–25: Measuring range R160
- 8 dial resolution with 3 comma place
- Maximum operation pressure PN 16 bar
- Maximum operating temperature 50 °C
- High grade wear resistant and corrosion proof materials
- Inlet strainer
- Reconditionable and recyclable execution
- Materials suited for contact with potable water
- CE Conformity according to European Measuring Instruments (MID)
- Standard register with Multiprotocol interface
- M-Bus standard unit load: 2 unit loads (3 mA)
- NSF-61-G & 372 certified for DN25 and DN40

Options

- Flood proof MTKcoder® MP register (IP68) with Multiprotocol interface and meter lid / 5 m cable
- Radio module RCM®-H200 compact or RCM®-H200 split
  Documentation: RCM®-H200 - EPe40265
- Radio module RCM®-LRW...
  Documentation: RCM®-LRW... - EPe40261

GWF AG
Obergrundstrasse 119
6005 Lucerne, Switzerland

T +41 41 319 50 50
info@gwf.ch, www.gwf.ch

Technical support:
T +41 41 319 52 00, support@gwf.ch

Last updated: 29.10.2026
Generated: 11.11.2026 22:10 | All rights reserved

Technical Data

Execution			MTKcoder® MP (horizontal)		
Nominal diameter	DN	mm	25	40	50
Connection thread on meter	NPSM	Inch	1¼	2	2⅜
Connection thread on coupling	NPSM	Inch	1	1¼	2
Operating pressure	PN	bar	16	16	16
Nominal flow rate	Q_3	m^3/h	6.3	16	25
Overload flow rate[1]	Q_4	m^3/h	7.875	20	31.25
Transitional flow rate ±2%	Q_2	m^3/h	0.063	0.16	0.25
Minimum flow rate ±5%	Q_1	m^3/h	0.039	0.1	0.156
Smallest readable volume		l	0,05	0,05	0,05
Maximum register reading		m^3	100'000	100'000	100'000
Temperature		max. °C	50	50	50
Measuring range			R160	R160	R160

1] Max. 1 h per 24 h, with max. total time of 100 h

Dimensions and weights			MTKcoder® MP (horizontal)		
Length without couplings	A	mm	260	300	300
Meter height with lid	B1	mm	135	160	174
Meter height with inductive interface	B1	mm	147	172	186
Meter height with radio module RCM ®-H200 compact	B2	mm	172	197	211
Meter height with lid from pipe centre line	C	mm	91	114	117
Meter height with inductive interface from pipe centre line	C1	mm	103	126	129
Meter height with radio module RCM ®-H200 compact from pipe centre line	C2	mm	128	151	154
Installation depth with lid from pipe centre line	W	mm	50	68	76
Installation depth with radio module RCM®-H200 compact from pipe centre line[1]	W1	mm	64	68	76
Installation depth IP68 or with inductive interface from pipe centre line[1]	W2	mm	57	68	76
Meter height with open lid	G	mm	183	208	222
Weight without couplings		app. kg	2.6	5.4	6.7
Weight with couplings		app. kg	3.0	6.4	8.7


1] By turning the register / assembly installation depth W can be realised

Generated: 11.11.2026 22:10 | All rights reserved


Certifications	MTKcoder® MP (horizontal)		
SVGW certification	x	x	-
UBA Brass (DIN 50930-6)	x	x	-
NSF-61-G & 372	x	x	-

Information	
EU-REACH Art. 33 / ChemV Art. 71	Brass products contain lead > 0,1 %

Measuring error curve

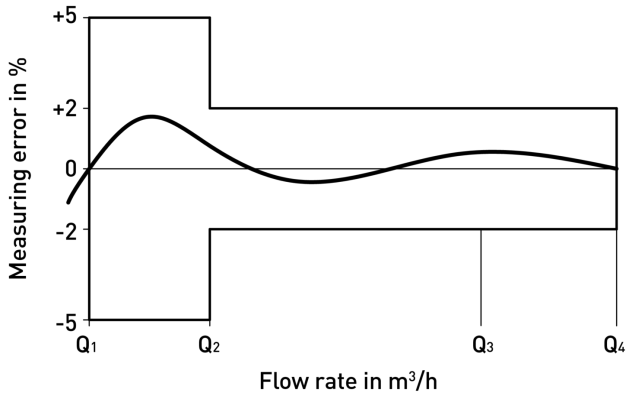

Typical Head Loss Curve

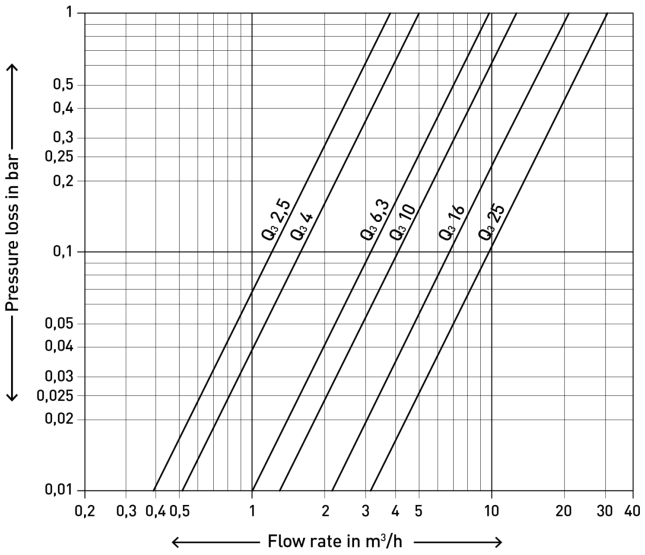

Materials


Housing	UBA Brass (DIN 50930-6)
Sealing plate	UBA Brass (DIN 50930-6)
Impeller / measuring insert	High grade synthetic materials
Bearings	Hard metal, Sapphire, Chrome nickel steel
Seal material	EPDM

Generated: 11.11.2026 22:10 | All rights reserved


Dimension Diagram

Register options		
Without cable	With 1,5 m cable	Floodproof IP68 with 5 m cable


MTKcoder® MP
with meter lid

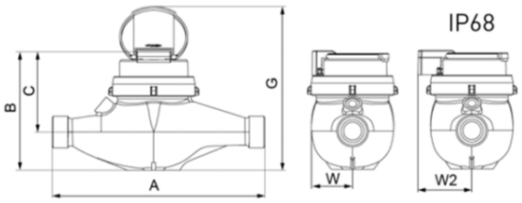

MTKcoder® MP
with inductive interface

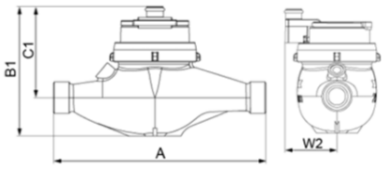

MTKcoder® MP
with radio module RCM®-H200 compact

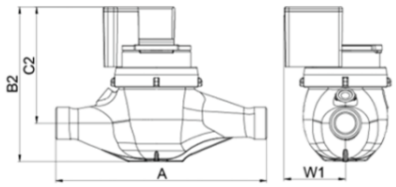

Installation

Pipeline: horizontal

Meter head: upwards

Installation Requirements

The meter must be installed so that the type plate is always horizontally positioned, facing upwards (do not tilt)

Documentation: GWF water meters - BAdfei10207


GWFcoder®-Technology

The 2nd generation – even more flexible

The well-established GWFcoder®-system reads the absolute mechanical register value precisely and reliably and provides the data through standardized interfaces. The number wheels with three various long, asymmetrically arranged slots are being scanned through light pipes which are connected to five light emitting diodes (LED). Thus, the exact position of each number wheel can be detected and the encoded absolute register read can be transmitted as part of the protocol by the GWFcoder®-interface. This GWF patented functional principle is being used in millions of installations worldwide since more than 15 years. The GWFcoder®-interface guarantees absolute correlation between the electronic readout and the register reading and provides an incomparably higher level of information compared to meters with pulse output. Meters with GWFcoder®-technology do not contain a battery which, in turn, does not compromise existing revision cycles. The readout device supplies the power for the readout.

GWF enhanced the reliable Smart Metering technology in its 2nd generation, so that 8 instead of 5 number wheels are being scanned and therefore a resolution of 1 liter is possible. Moreover, all products with multiprotocol functionality provide the flexibility to switch between SCR(IEC) and M-Bus which leads to an easy and fast «Plug & Play» installation on site.

In combination with the GWF radio module RCM®-H200 the third interface can be used for wireless M-Bus.

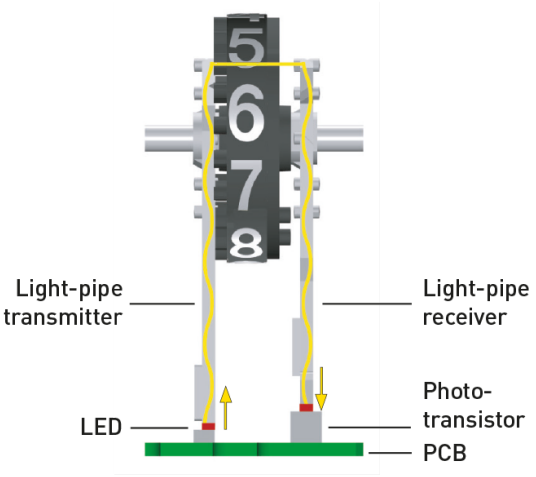




Generated: 11.11.2026 22:10 | All rights reserved

GWFcoder®-Data package


SCR: IEC 62056-21 Mode A (IEC 1107)	
Medium	Water
Absolute meter reading:	12365,678 m^3
Serial number:	13215678
Meter size:	DN 20
M-Bus	EN 13757
ECO	EN 13757-3

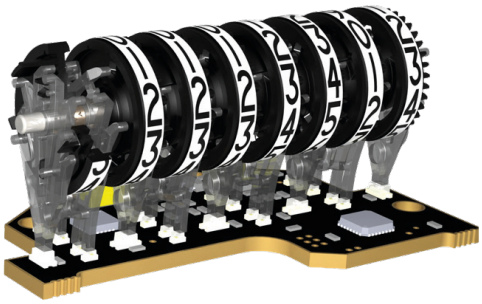

Example of use

Wireless readout

Meter with GWFcoder® register is read out by radio using a mobile infrastructure.

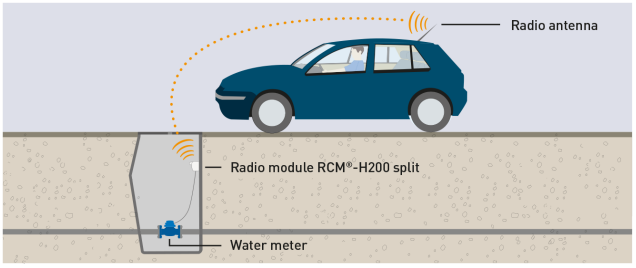

Generated: 11.11.2026 22:10 | All rights reserved