



## RR10 - M-Bus

Wireless M-Bus radio receiver



### Your benefits

- Wireless in-house meter reading transmission - wireless M-Bus:  
**Installation of complex wiring connections in existing cellars is not required (no coordination work with property owners, no changes to buildings)**
- Proven radio transmission in combination with the radio module RCM® for GWFcoder® water and gas meters:  
**Long range**
- No parameterisation required for initial start-up (secondary addressing):  
**Easy and fast on-site installation**
- Radio connection from just one source:  
**One contact for transmitting and receiving data – clear system/responsibility limits**


### Properties

- M-Bus protocol according EN 13757-3
- No external supply required - M-Bus supply
- Reception of up to 64 GWFcoder® water or gas meters (Dependent on the sent data protocol length)

### Applications

- Smart metering – readout of electricity, gas, water and heat meters
- Wireless transmission of meter readings to in-house data gateway
- For all verified masters with M-Bus interface

The radio receiver allows you to receive consumption data from water, gas and heat meters at a central location in a building and to provide this data on a standardised interface EN 13757-3. This interface enables, e.g. intelligent electricity meters to read data and to send it to a central server where customers can, e.g. read their daily water, gas or heat consumption via a web portal. The radio receiver RR10 - M-Bus in combination with the radio module RCM<sup>®</sup> for GWFcoder<sup>®</sup> water or gas meters creates a «wireless M-Bus bridge», meaning complex wiring connections routed through cellars to water and gas meters are not required.

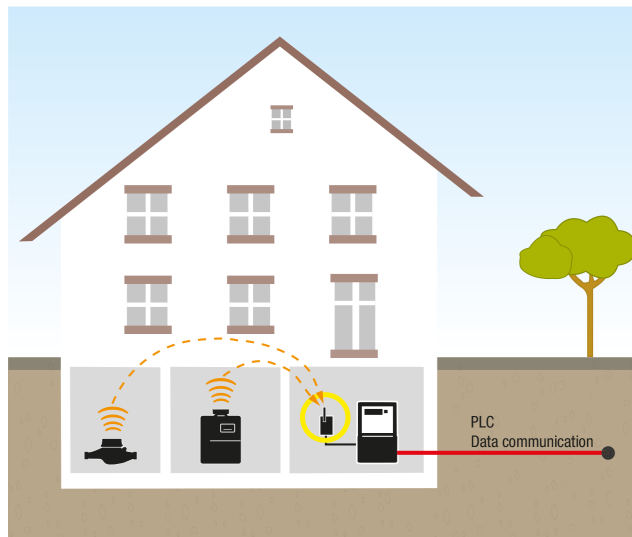

## General performance

The radio receiver supports the following functions:

- Primary address search
- Secondary address search
- Readout (secondary and primary)
- Active list – filter function
- Active list – setting primary address

# Technical Data

## Version

RR10 - M-Bus - M-Bus interface (data protocol: M-Bus EN 13757-3)

## Data transmission M-Bus

Baud rate	2400 baud
Primary address	1-250 programmable
Secondary address	Meter number (8 digits)
No. of meters	64 (Dependent on the sent data protocol length)

## M-Bus device load

Load (incl. power supply)	6 M-Bus unit loads (9 mA)
---------------------------	---------------------------

## Max. cable length

M-Bus connection cable	1 m
M-Bus transmission range	Network dependent

## Dimensions and weight

Dimensions	140x55x25 mm
Weight	app. 60 g

## Application

Temperature	-10 to +55 °C
Protection class	IP54

## Radio reception

Wireless M-Bus EN 13757-4 mode T1	Radio protocol RCM®
Radio reception frequency	868,95 MHz
Range	Depends on ambient conditions (up to 100 m)

## Type of mounting

Screw fastening